

WATER TREATMENT SYSTEMS

RECOVERY AND RECYCLE SYSTEM



PWR Series

Recovery and Recycle System



MODEL NUMBER	VACUUM MOTOR	TANK CAPACITY	FILTER PUMP	WATER BERM	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
PWR-10-0ME1	3-stage, 1500W, 12.5A full load	55-gallons	1/3 HP, 120V, 1Ø, 8.0A, 60Hz	6in.x20ft.	48x42x60in.	340 lb.	290 lb.

ACCESSORIES:

PART NUMBER	DESCRIPTION			
19-0216	30-micron poly filter – 20-inch, pleated			
19-0302	10-micron cartridge filter – 20-inch			
21-0306	Stainless-steel suction head			
33-0520	Water berm – 6-inch x 20-foot			
33-0529	Oil absorbing boom – Oil sock for inside of tank			
855-0057	50-foot x 1½-inch vacuum hose - Can have up to 100-foot of extension hose			

OPTIONS:

PART NUMBER	DESCRIPTION			
TX-0010	Adjustable trailer coupler hitch, 2-inch — Replaces the standard 2-inch ball hitch with a 2-inch trailer hitch with pin-style fastener trailer coupler and hinged ball socket; for AW-9000-0010 trailer package.			
TX-0019	Lunette ring hitch, 3-inch – Replaces the standard 2-inch ball hitch with a 3-inch integrated lunette ring for use with pintle hitches; for AW-9000-0010 trailer package.			
WX-0106	Wheel kit – Includes two flat-free tires, powder coated steel frame and handle			
WX-0109	Dual filters – Uses 30-micron filter #19-0216 and 10-micron filter #19-0302. Includes one set of filters installed in housings and one set of replacement filters.			
WX-0129	Dual filters for PWR-10-0ME1 trailer-mount package — Uses 30-micron filter #19-0216 and 10-micron filter #19-0302. Includes one set of filters installed in housings and one set of replacement filters.			

PWR Series Trailer Packages Include:

- Portable water recovery trailer, AW-9000-0010
- Portable water recovery system, PWR-10-0ME1 with dual filter option, WX-0129
- Hot water pressure washer Choose from HVS-3505-1H6G or HDS-3505-1H6G

Portable Water Recovery Trailer, AW-9000-0010

- 5-foot x 8½-foot dual-axle trailer
- 200-gallon water tank enclosed in powder coated steel frame
- · Swivel jack with stand
- · Rubber mounted sealed lights
- 50-foot inlet garden hose with hose reel
- 100-foot high pressure hose with hose reel
- · Tank feed for pressure washer
- · Option to directly feed water from inlet hose reel

PWR-10-0ME1 with WX-0129 Option for Trailer

Includes all standard PWR Series features, as well as:

- Mounts to AW-9000-0010 trailer
- 2 cartridge filters 30 and 10-micron; includes one set of replacement filters. Other sizes are available, consult factory.
- Automatic discharge to outlet valve for reuse or discharge

Hot Water Pressure Washer, HVS-3505-1H6G with **HX-0252 Option for Trailer**

- 3500 PSI @ 4.2 GPM
- GX630 Honda OHV gasoline engine
- Belt drive triplex piston clutch driven General pump
- Heavy-duty powder coated steel square tube skid frame
- Powder coated steel coil wrap and control panel
- Trailer tank feed
- 80-mesh inlet. Y-strainer
- Generator wired for burner and PWR-10-0ME1 with dual filters option, WX-0129
- Consult factory for additional options available for the HVS-3505-1H6G

Hot Water Pressure Washer, HDS-3505-1H6G with **HX-0253 Option for Trailer**


- 3500 PSI @ 4.2 GPM
- GX630 Honda OHV gasoline engine
- Belt drive triplex piston clutch driven General pump
- Heavy-duty powder coated steel square tube skid frame
- Powder coated steel coil wrap and control panel
- Trailer tank feed
- 80-mesh inlet, Y-strainer
- Generator wired for burner and PWR-10-0ME1 with dual filters option, WX-0129
- Consult factory for additional options available for the HDS-3505-1H6G



Scan to see how the PWR Series trailer works



PWR Series Application

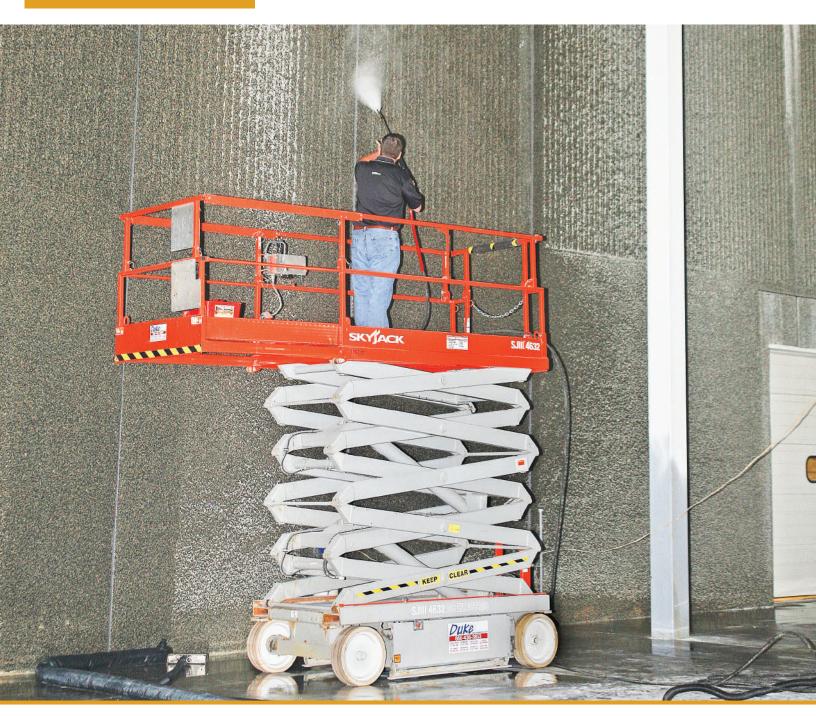



www.mitm.com
50 Mi-T-M Drive • Peosta, IA 52068
ph 800-553-9053 • fax 563-556-1235
corp@mitm.com

Distributed by:

