

WATER TREATMENT SYSTEMS

HIGH-VOLUME WATER CANNONS

WC AND CHV SERIES

MAKING A POSITIVE IMPACT ON OUR ENVIRONMENT FOR TODAY AND FUTURE GENERATIONS.

WC Series



The high-volume water cannon system acts like a water blaster, pre-washing heavy equipment and tracked vehicles. The tough, high gallon-per-minute centrifugal system blasts away mud and dirt

with ease.

Applications:

- Rental yards
- Lumber yards
- Mining operations Heavy equipment dealers
- Solid waste haulers
- Unit Includes:
- Single remote

MODEL NUMBER	DESCRIPTION	GPM @ PSI	HORSEPOWER	DIMENSIONS (LxWxH)	SHIP WT.
WC-100-0ME3	Mud blasting pump system with centrifugal separator (208-230V, 3Ø, 20-22.0A or 460V, 3Ø, 10.0A)	100@60	7.5	42x20x66in.	500 lb.
WC-150-0ME3	Mud blasting pump system with centrifugal separator (208-230V, 3Ø, 38.0A or 460V, 3Ø, 19.0A)	150 @ 80	15.0	45x21x67in.	650 lb.
WC-400T-0ME3	Truck wheel wash pump system, for minimum vertical lift feed, 5 or 6-feet or tank feed (230V, 30, 116.0A, 60Hz motor or 460V, 30, 58.0A)	400 @ 125	50.0	58x28x75in.	1178 lb.

ACCESSORIES:

PART NUMBER	DESCRIPTION	FITS MODELS
12-0084	Surge suppressor – Eliminates water logging and failures	WC-100 & WC-150
15-2001	Hose for water cannon – 100-foot x 11/2-inch ID with couplings	WC-100 & WC-150
18-2009	Adjustable fire hose nozzle – Adjustable spray settings, 150-GPM	WC-100 & WC-150
22-0322	Metal foot-valve – 2-inch	WC-100-0ME3
22-0323	Metal foot-valve - 3-inch	WC-150-0ME3
22-0400	Metal foot-valve – 4-inch	All models
50-2001	Hose reel for 11/2-inch booster hose - 100-foot	WC-100 & WC-150
RC-0015-0001	Remote switch assembly – Comes standard with one remote	WC-100 & WC-150

OPTIONS:

PART	NUMBER	DESCRIP

PART NUMBER	DESCRIPTION	FITS MODELS
WX-0002	460V, 3Ø, 10.0A - Upgrades 208-230V model to operate at 460V	WC-100-0ME3
WX-0003	460V, 3Ø, 19.0A - Upgrades 208-230V model to operate at 460V	WC-150-0ME3

Cold Water Electric Belt Drive Pressure Washers

CHV Series

Receive more power with less pressure. This cold water, highvolume pressure washer is the perfect answer for applications that require cleaning of heavy solids, especially from large industrial equipment. CHV-0525-1ME1 Pump: **Typical Water Treatment Installation** Belt drive diaphragm AR pump with pulsation CHV-0525-1ME1 is connected to optional 300-gallon tank, CX-0072, which is connected dampener to optional sump and in-ground fiberglass pit Motor: from the water treatment line. • Totally enclosed fan-cooled electric motor with

- 1. Water supply hose to pressure washer.
 - 2. Water supply hose to tank fill.
 - 3. High pressure hose to gun.
 - 4. Pump inlet hose.
 - 5. Pump by-pass hose.
- thermal overload protection
- 10-foot power cord

Components:

- Pressure regulator with manual dump lever and gauge
- Makeup water shut-off solenoid and flow switch on outlet
- Time delay shutdown

Unit Includes:

- Stainless-steel long range nozzle • 50-foot x ³/₄-inch non-marking high pressure
- hose with quick connects • High-volume gun with adjustable pattern
- from straight stream to cone mist

MODEL NUMBER	DESCRIPTION	GPM @ PSI	HORSEPOWER/MOTOR	DIMENSIONS (LxWxH)	SHIP WT.
CHV-0525-1ME1	Cold water stationary electric belt driven pressure washer	25 @ 500	10.0 HP, 230V, 1Ø, 41.5A	38x23.5x24in.	432 lb.
CHV-0525-1ME3	Cold water stationary electric belt driven pressure washer	25 @ 500	10.0 HP, 230V, 3Ø, 25.6A	38x23.5x24in.	407 lb.

ACCESSORIES:

PART NUMBER DESCRIPTION

TAIL NOMBER		THOMODEED
16-0440	Replacement gun - Replacement high-volume long range gun with adjustable pattern from straight stream to cone mist	All models
50-0185	Hose reel - For convenient storage of hose; holds up to 200-foot of 34-inch hose	All models


OPTIONS:

PART NUMBER	DESCRIPTION	FITS MODELS
CX-0072	300-gallon tank – 300-gallon tank with stand, suction hose and float	All models
CX-0073	460V, 30 - For when you have 460V of power available	All models
CX-0074	18-inch stand – Raises unit off of ground	All models
CX-0075	Remote start control box – For when unit is not near spraying location	All models

FITS MODELS

CHV Series Application

Ideal for Heavy Mud Removal Applications The High-Volume GPM Cuts Cleaning Time Significantly

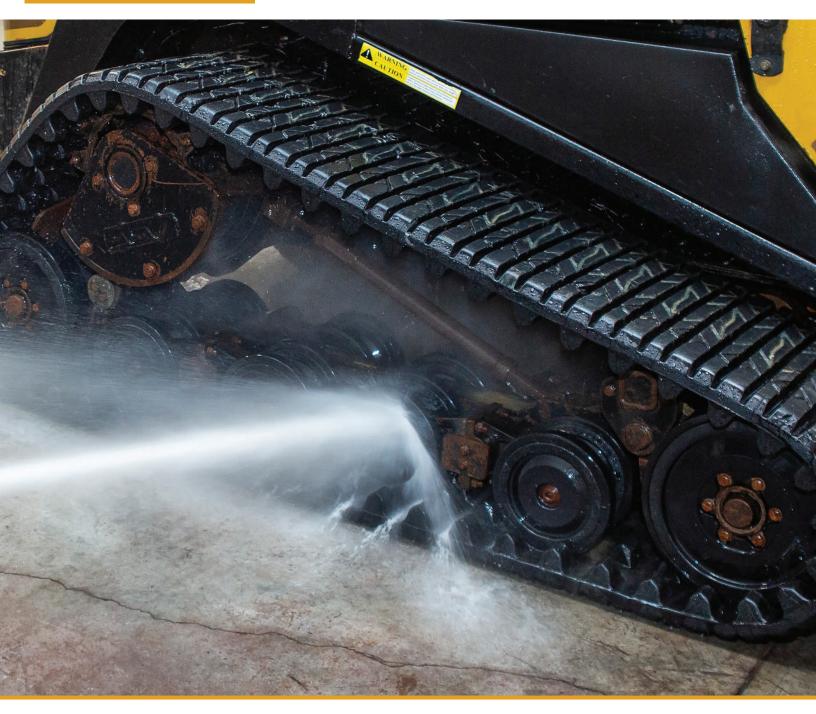



www.mitm.com 50 Mi-T-M Drive • Peosta, IA 52068 ph 800-553-9053 • fax 563-556-1235 corp@mitm.com Distributed by:



WARNING: Cancer and Reproductive Harm www.P65warnings.ca.gov.